


CITYSUN Classik

STREET LIGHT SOLAR PANEL

Model	Classik 1	Classik 2
SPECIFICATION	3 hours 100%, 3 hours 50% 5 hours 30%	4 hours 100%, 4 hours 50% 4 hours 30%
Working Voltage	DC24V	DC24V
LED chips	Bridgelux	Bridgelux
Output Power	2*20	2*20
Light Luminoud efficacy	110lm/w	110lm/w
Color Temperature	3000- 6500k	3000- 6500k
Beam angle	125 degree	125 degree
Protection grade	IP65	IP65

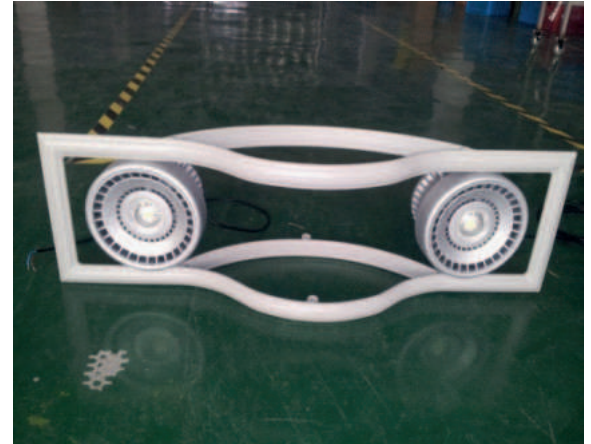

Surface color of light : Silver Frey



SOLAR PANEL

Model	Classik 1	Classik 2
SPECIFICATION	3 hours 100%, 3 hours 50% 5 hours 30%	4 hours 100%, 4 hours 50% 4 hours 30%
Type	Mono-crystalline	Mono-crystalline
Power	80W	100W
Working Voltage	36V	36V
Product size (L*W*H) for each piece	1200*540*35	1200*540*30
Cell efficiency	15.60%	18.60%



CITYSUN Classik

STREET LIGHT SOLAR PANEL



POLE & ACCESSORIES

Model	Classik 1	Classik 2
SPECIFICATION	3 hours 100%, 3 hours 50% 5 hours 30%	4 hours 100%, 4 hours 50% 4 hours 30%
Pole Height	3.5m	3.5m
Thickness	3.0mm	3.0mm
Solar Panel Holder Bracket	one frame	one frame
Surface treatment	Hot dip Galvanized and powder coating	Hot dip Galvanized and powder coating
Surface color	silver gray/black/white	silver gray/black/white
Pole underground base	1 unit including all necessary fasteners	1 unit including all necessary fasteners

GEL BATTERY

Model	Classik 1	Classik 2
Capacity	2* 12V 50AH	2*12V 65AH
Net Weight	2*15.7kg	2*21.2kg
Product size (L*W*H)	2*224*138*229mm	2*350*174*166mm
Battery box	1 Unit	1 Unit

